
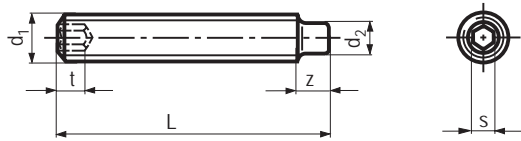


Gewindestifte mit Innensechskant und Zapfen

Vis sans tête à six pans creux et téton

Viti senza testa con esagono incassato ed estremità cilindrica


DIN 915 ISO 4028	A2 
BN 619 <input type="checkbox"/> A2	




Pakete / paquets  
IP Industriepakete / paquets industriels


Werkstoff: A2  
Matière: A2

d <sub>1</sub>	M3	M4	M5	M6	M8	M10	M12	
d <sub>2</sub>	2	2,5	3,5	4	5,5	7	8,5	
s	1,5	2	2,5	3	4	5	6	
z	über Stufenlinie	0,75-1	1-1,25	1,25-1,5	1,5-1,75	2-2,25	2,5-2,75	3-3,25
	unter Stufenlinie	1,5-1,75	2-2,25	2,5-2,75	3-3,25	4-4,3	5-5,3	6-6,3
t	über Stufenlinie	1,2	1,5	2	2	3	4	4,8
	unter Stufenlinie	2	2,5	3	3,5	5	6	8

d <sub>1</sub>	M3	M4	M5	M6	M8	M10	M12
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	BN 619	BN 619	BN 619	BN 619	BN 619	BN 619	BN 619
Bei Bezug von	100	100	100	100	100	100	100
L	4	•					
	5	•					
	6	•	•	•	•		
	8	•	•	•	•		
	10	•	•	•	•	•	
	12	•	•	•	•	•	•
	16		•	•	•	•	•
	20			•	•	•	•
25				•	•	•	
30				•	•	•	
40				•	•	•	
	100/IP						50/IP



Anziedrehmomente siehe Seite T.037  
Couples de serrage voir à la page T.037



Siehe Gruppe 1  
Voir groupe 1

Bestellbeispiel:	Exemple de commande:
100 BN 619 M12x25 oder 100 Gewindestifte mit Innensechskant und Zapfen DIN 915 A2 M12x25	100 BN 619 M12x25 ou 100 Vis sans tête à six pans creux et téton DIN 915 A2 M12x25



Bossard AG Schrauben Tel. 041 749 66 11 Fax 041 749 66 22